


<p>FEATURES</p> <ul style="list-style-type: none"> Programmable Output Voltage to 40V Low Dynamic Output Impedance 0.27Ω (Typ) Sink Current Capability of 0.1 mA to 100 mA Equivalent Full-Range Temperature Coefficient of 50ppm/°C Temperature Compensated for Operation over Full Rated Operating Temperature Range Low Output Noise Voltage Fast Turn on Respons SOT-23 and TO-92 packages <p>DESCRIPTION</p> <p>The IL431LB Series is a three-terminal adjustable regulator series with a guaranteed thermal stability over applicable temperature ranges. The output voltage may be set to any value between Vref (approximately 2.5 volts) and 40 volts with two external resistors. These devices have a typical dynamic output impedance of 0.2Ω. Active output circuitry provides a very sharp turn-on characteristic, making these devices excellent replacement for zener diodes in many applications.</p> <p>概述</p> <p>IL431LB为三端可调节精密基准源。通过两个外接电阻，输出电压可在 V_{REF}(约2.5V) 到40V连续调节。该电路输出阻抗小(0.2Ω)。开启特性好，在许多应用场合，它能较好地替换齐纳二极管。采用 SOT-23、TO-92 封装</p> <p>特征</p> <ul style="list-style-type: none"> ■ 平均温度系数50ppm/°C ■ 全工作温度范围内带温度补偿 ■ 可调节输出电压 ■ 快速的响应速度 ■ 低输出噪声 	<p align="center">IL431LB Series Pin Assignment</p> <div style="display: flex; justify-content: space-around;"> <div data-bbox="1021 324 1189 526"> <p>3-Lead Plastic SOT-23 Package Code: N Pin 1: Reference Pin 2: Cathode Pin 3: Anode</p> </div> <div data-bbox="1013 571 1228 884"> <p>3-Lead Plastic TO-92 Package Code: A Pin 1: Reference Pin 2: Anode Pin 3: Cathode</p> </div> </div>
--	--


Ordering Information & Ordering methods

Package		V _{REF} : 2.495±0.3%	V _{REF} : 2.495±0.5%	V _{REF} : 2.495±1%	V _{REF} : 2.495±2%
N	SOT-23	IL431LB-AN	IL431LB-BN	IL431LB-CN	IL431LB-DN
A	TO-92	IL431LB-AA	IL431LB-BA	IL431LB-CA	IL431LB-DA

SYMBOL



FUNCTIONAL BLOCK DIAGRAM

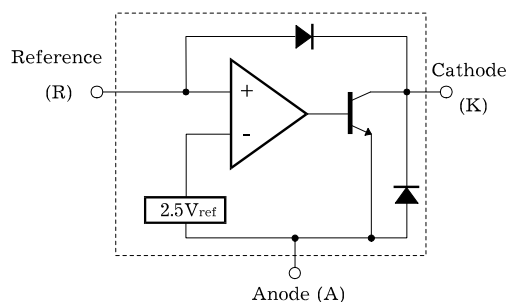

ABSOLUTE MAXIMUM RATINGS (Operating temperature range applies unless otherwise specified)

Characteristic	Symbol	Value	Unit
Cathode Voltage	V _{KA}	40	V
Cathode Current Range (Continuous)	I _K	-100~+150	mA
Reference Input Current Range	I _{REF}	0.05~10	
Power Dissipation at 25°C	TO-92 Package (R _{JA} =178°C/W)	0.7	W
	SOT-23 Package (R _{JA} =625°C/W)	0.2	
Junction Temperature Range	T _J	0~150	°C
Storage Temperature Range	T _{stg}	-65~+150	

RECOMMENDED OPERATING CONDITIONS

Characteristic	Symbol	Test condition	Min	Typ	Max	Unit
Cathode Voltage	V_{KA}		V_{REF}		40	V
Cathode Current	I_K		0.5		100	mA

ELECTRICAL CHARACTERISTICS ($T_A=25^{\circ}C$, $V_{KA}=V_{REF}$, $I_K=10mA$ unless otherwise specified)

Characteristic	Symbol	Test condition	Min	Typ	Max	Unit	
Reference Input Voltage	V_{REF}	$V_{KA}=V_{REF}$ $I_K=10mA$	$\pm 0.3\%$	2.488	2.495	2.502	V
			$\pm 0.5\%$	2.483	2.495	2.507	
			$\pm 1\%$	2.470	2.495	2.520	
			$\pm 2\%$	2.445	2.495	2.545	
Deviation of Reference Input Voltage Over Full Temperature Range	$V_{REF(dev)}$	T_{min}		3	17	mV	
Ratio of Change in Reference Input Voltage to the Change in Cathode Voltage	$\Delta V_{REF}/\Delta V_{KA}$	$\Delta V_{KA}=10V-V_{REF}$	-0.4	0.0	2.7	mV/V	
		$\Delta V_{KA}=36V-10V$	-0.4	0.0	2.0		
Reference Input Current	I_{REF}	$R_1=10K\Omega$, $R_2=\infty$		1.8	4.0	μA	
Deviation of Reference Input Current Over Full Temperature Range	$I_{REF(dev)}$	$R_1=10K\Omega$, $R_2=\infty$		0.4	1.2		
Minimum Cathode Current for Regulation	$I_{K(MIN)}$			0.25	0.50	mA	
Off-State Cathode Current	$I_{K(off)}$	$V_{KA}=40V$, $V_{REF}=0$		0.17	0.90	μA	
Dynamic Impedance	Z_{KA}	$I_K=1mA$ to $100mA$, $f \leq 1.0KHz$		0.27	0.50	Ω	

TEST CIRCUITS

Fig-1. Test Circuit for $V_{KA}=V_{REF}$

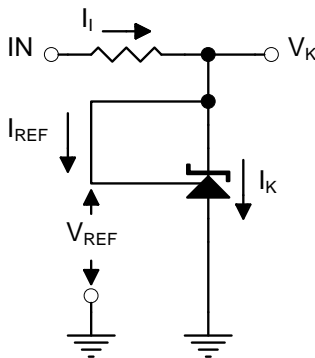


Fig-2. Test Circuit for $V_{KA} \geq V_{REF}$



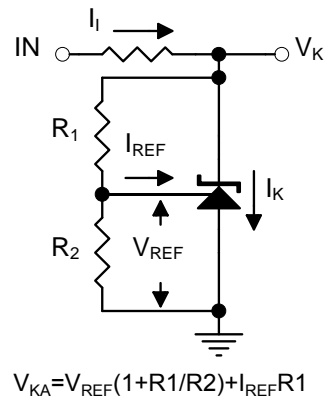



Fig-3. Test Circuit for I_{off}



PAD LAYOUT

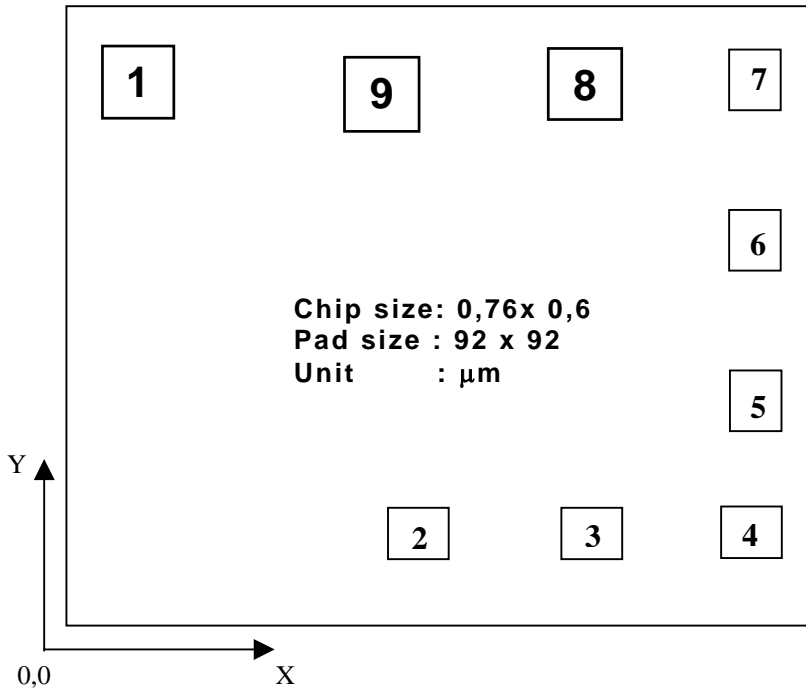

BONDING DIAGRAM

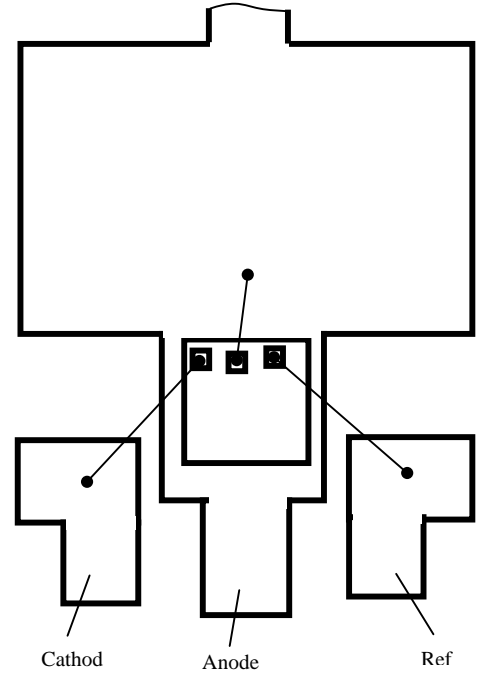






PAD LOCATION

Pad No.	Pad Name	Description	X	Y
1	K	Cathode	53	442
9	A	Anode	325	437
8	R	Reference	525	450

PHYSICAL CHARACTERISTIC


Wafes dia	100 mm (4")
Wafes width	280 \pm 20 μm
Scribe width	60 μm
Passivation	PSG
Backside metallization	Without metallization

Characteristics Curve

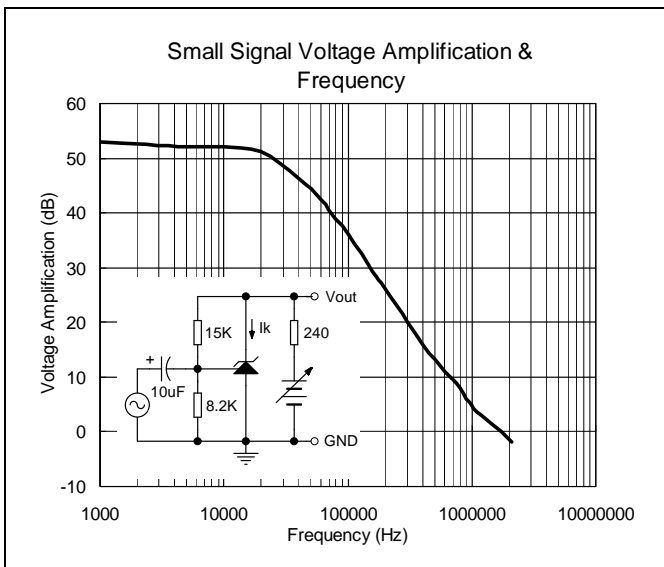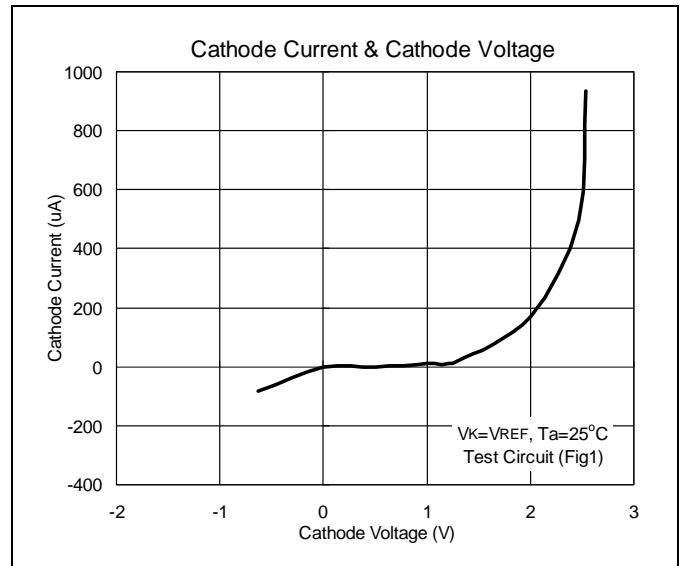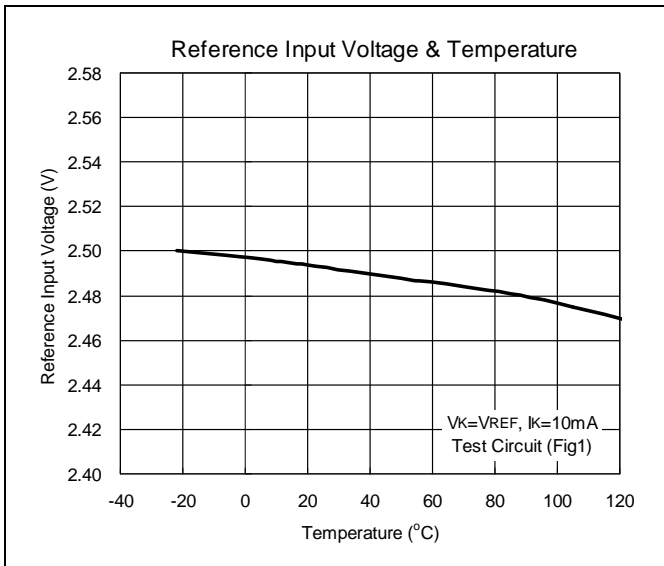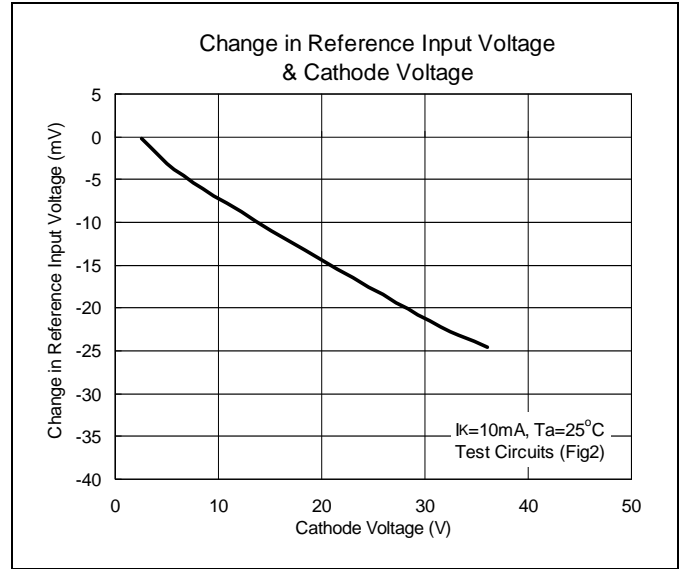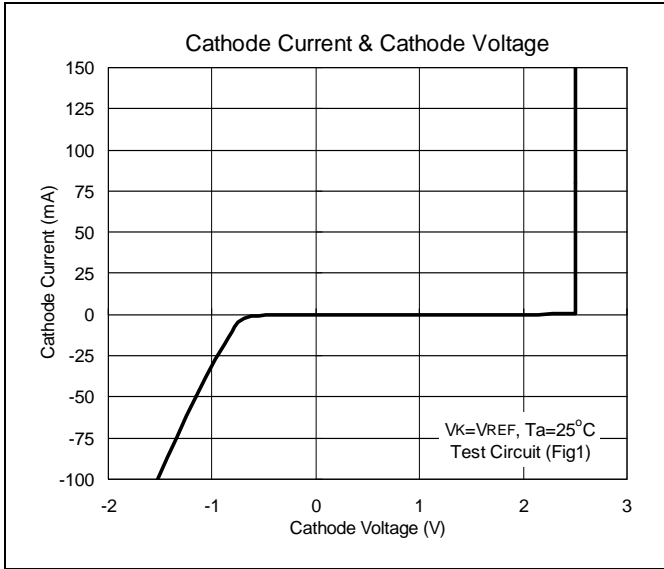


Typical Application

Fig 4. Shunt Regulator

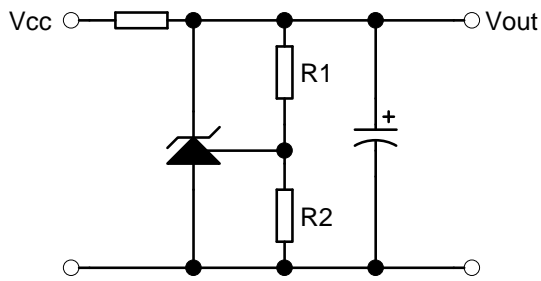


$$V_{out} = (1 + R_1/R_2)V_{REF}$$

Fig 5. High Current Shunt Regulator

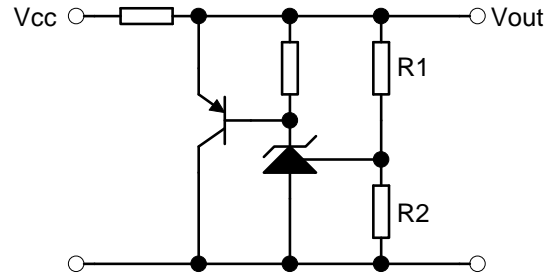


$$V_{out} = (1 + R_1/R_2)V_{REF}$$

Fig 6. Output Control of a Three-Terminal Fixed Regulator

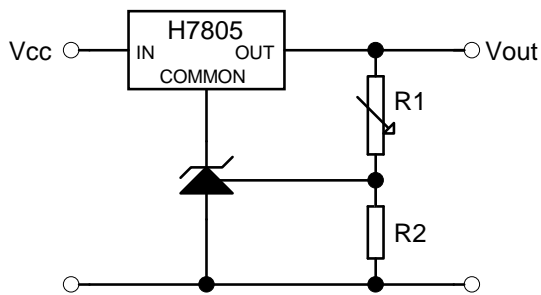


$$V_{out} = (1 + R_1/R_2)V_{REF}; V_{out(min)} = V_{REF} + 5V$$

Fig 7. Series Pass Regulator

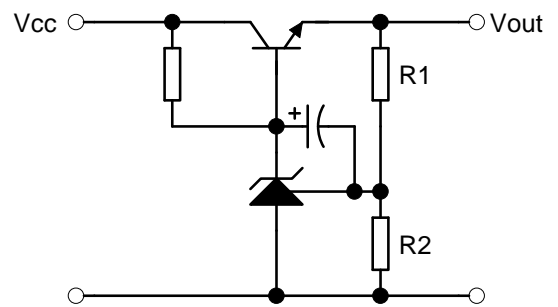


$$V_{out} = (1 + R_1/R_2)V_{REF}; V_{out(min)} = V_{REF} + V_{BE}$$

Fig 8. Current Limiter or Current Source

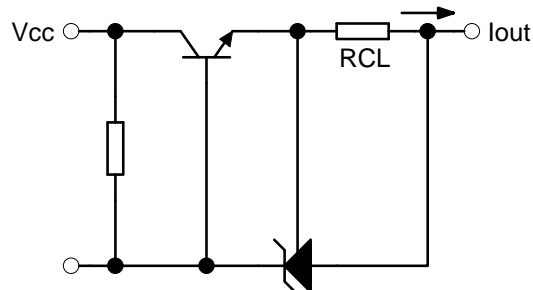

$$I_{out} = V_{REF}/R_{CL}$$

Fig 9. Constant Current Sink

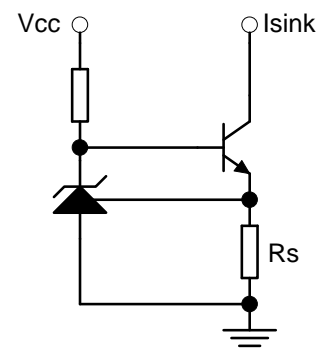

$$I_{sink} = V_{REF}/R_S$$

SOT-23 Package Dimension

Marking

3-Lead SOT-23 Plastic Surface Mounted Package HAOHAI Package Code: N	<p>Data Unit: mm</p>	<p>All products are lead-free processes Packaging 所有产品均为无铅环保制程封装</p>
--	----------------------	--


SOT-23 包装规格及包装尺寸数据 Packaging Specifications

<p style="text-align: center;">SOT-23 Tape and Reel SOT-23 Embossed Carrier Tape</p>	<p>Packaging Description: SOT-23 parts are shipped in tape, The carrier tape is made from a dissipative (carbon filled) polycarbonate resin. The cover tape is a multilayer film (Heat Activated Adhesive in nature) primarily composed of polyester film, adhesive layer, sealant, and anti-static sprayed agent. These reeled parts in standard option are shipped with 3000 units per 7" or 17.8cm diameter reel. The reels are clear in color and is made of polystyrene plastic (anti-static coated).</p>
--	--

Dimensions are in millimeter (单位: 毫米)


Pkg type	A	B	C	d	E	F	P0	P	P1	W
SOT-23	3.15	2.77	1.22	Φ1.50	1.75	3.50	4.00	4.00	2.00	8.00
(Tolerance)	±0.1	±0.1	±0.1	±0.1	±0.1	±0.1	±0.1	±0.1	±0.1	+0.3/-0.1

SOT-23 Tape Leader and Trailer (载带尺寸)

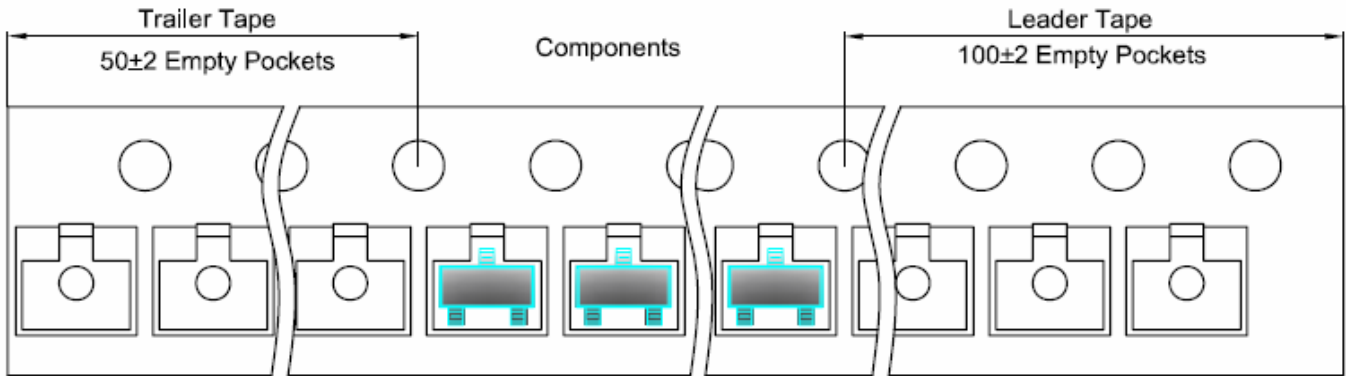

SOT-23 Tape Leader and Trailer (卷盘尺寸)

SOT-23 Reel

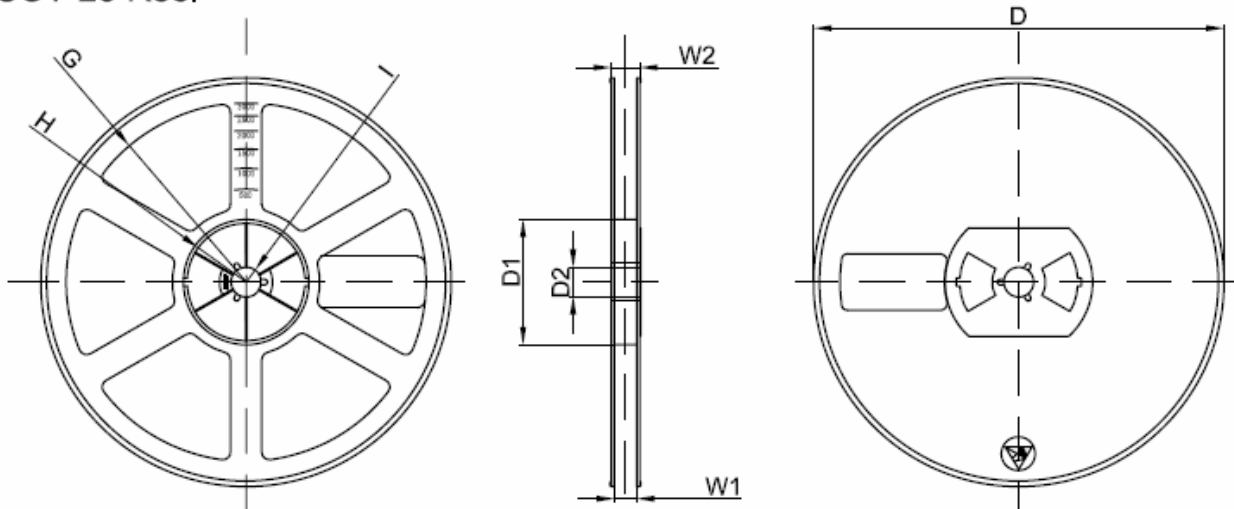

Dimensions are in millimeter

Reel Option	D	D1	D2	G	H	I	W1	W2
7" Dia	Φ178	54.40	13.00	R78.00	R25.60	R6.50	9.50	12.3
Tolerance	±2	±1	±1	±1	±1	±1	±1	±1

REEL	Reel Size	BOX	Box Size(mm)	Carton	Carton Size(mm)	G.W.(Kg)
3000 Pcs	7 Inch	45,000 Pcs	203×203×195	180,000 Pcs	438×438×220	

SOT-23 产品装箱规格 Packaging Specifications



Tape & Reel Packing 3Kpcs/Reel 45Kpcs/BOX 180Kpcs/Cartons	载带卷盘包装 每卷3,000只 每盒45,000只 每箱180,000只
--	---



3000 × 15 Pcs



3000 × 1 Pcs



Label on the Inner BOX
 Inner BOX:
 210 × 210 × 205 mm



45,000 × 4 Pcs



Label on the Outer BOX
 Outer BOX:
 445 × 435 × 230 mm

TO-92 Package Dimension

Marking

3-Lead TO-92 Plastic Package
HAOHAI Package Code: A

Diagram showing dimensions A through J and angles α1, α2, α3 for the TO-92 package. Dimensions include width (A), height (B), lead length (C), lead thickness (D), lead width (E), lead spacing (F), lead diameter (G), and lead pitch (H). Angles α1, α2, and α3 are also indicated.

DIM	Min.	Max.
A	4.33	4.83
B	4.33	4.83
C	12.70	--
D	0.36	0.56
E	--	*1.27
F	3.36	3.76
G	0.36	0.56
H	--	*2.54
J	--	*1.27
α1	--	*5°
α2	--	*2°
α3	--	*2°

*: Typical, Unit: mm

Marking diagram showing the layout on the package: H, TL431A, LBxxxx.

All products are lead-free processes Packaging

H: HAOHAI
 LB: Chip code
 XXX: Iron foot lead
 XXXX: Copper foot lead

TO-92 产品装箱规格 Packaging Specifications

1000 × 10 Pcs

1000 × 1 Pcs

Label on the Inner BOX
 Inner BOX:
 238 × 161 × 96 mm

10,000 × 10 Pcs

Label on the Outer BOX
 Outer BOX:
 502 × 348 × 252 mm

BAG	BOX	Box Size(mm)	Carton	Carton Size(mm)	G.W.(Kg)
1000 Pcs	10,000 Pcs	238 × 161 × 96	100,000 Pcs	502 × 348 × 252	

Manufacturers version information

2011-08-05 , HAOHAI™ Product Data-V1.0

2014-05-05 , HAOHAI™ Product Data-V2.0

2015-12-10 , HAOHAI™ Product Data-V2.1



经中华人民共和国工商行政管理总局商标局批准

HAOHAI、HHE 图案、字母、均为我公司正式注册商标，仿冒、盗用均属侵权，违法必究！

WARN: Letters, patterns, are officially registered my trademark counterfeiting, theft are all violations, violators will be held liable !

深圳市浩海电子有限公司

SHENZHEN HAOHAI ELECTRONICS CO., LTD.

2 floor(whole floor), BAOXIN Building. 0 Lane on the 8th. Yufeng Garden.
82 District. BAOAN District, Shenzhen City, Guangdong Province, China.

公司电话 TEL: +86-755-29955080、29955081、29955082、29955083
总机八线 29955090、29955091、29955092、29955093

FAX: +86-755-27801767

E-mail:kkg@kkg.com.cn

<http://www.szhhe.com>

<http://www.kkg.com.cn>